

17'7" X 26'7" BAHAMA


ACCEPTED BY _____

A	17'7"	J	4'
B	26'7"	K	6'
D	3'4"	L	8'
E	28"	M	8'7"
F	6'	T	-
G	VAR.	S	-
H	4'	N	-
I	4'	P	-

APSP TYPE **0**

SQ. FOOTAGE

465

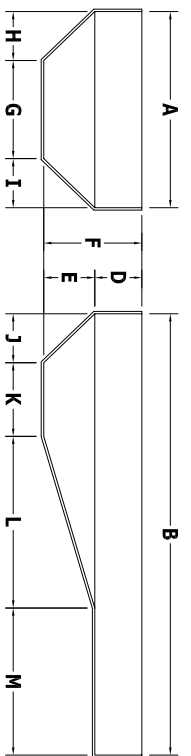


DATE _____

PURCHASE ORDER _____

BILL OF MATERIALS

QTY	PART	DESCRIPTION
5	HP359	9'R PANEL
1	HP399LL	9'R PANEL (LIGHT)
2	HP359A	9'R PANEL (AG)
3	HP125D	(9'R) 3' ROMAN INSERT
2	HP110D	(9'R) 2' OVAL INSERT
1	HP115D	(9'R) 1' OVAL INSERT
8	HP319N	9'R REVERSE
4	HP521	30° LAZY-ELL PANEL
27	HP599	BRACE
1	HS106N	RADIUS 8' STEP

OVERDIG DETAIL

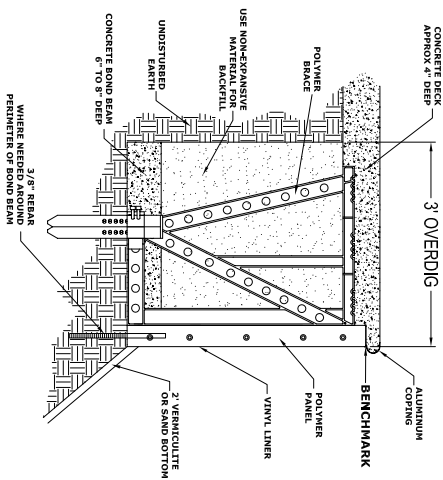

* NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

NO DIVING WARNING

NO DIVING WARNING STICKERS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING TO NSPI SPECIFICATIONS



PRE-CUT PANEL LEGEND



GENERAL NOTES


1. These are finished dimensions ready for the liner.
2. Dimensions are from inside pool panels.
3. The ideal water level should be to the middle of the skimmer opening(s).

EXCAVATION NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See Overdig Detail for excavation around pool.
5. Fill voids under base of panels and lamp well.
6. Backfill with non-expansive material.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.

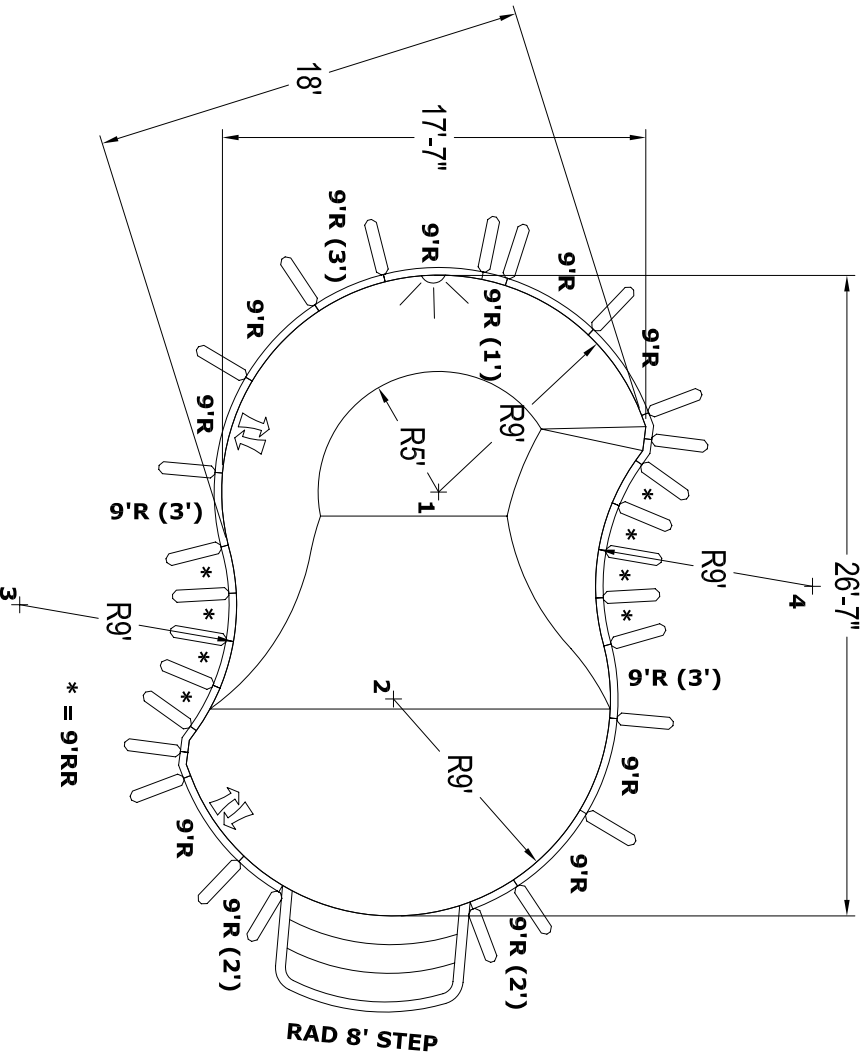

543 South Main Street - Sweetwater, TN 37874

DATE
MAY 2007

PANEL LINE
PINNACLE
DRAWING NUMBER
BH17269R6P-PWH