



Hardware: Installing Springs with D-Rings



STEP 1:

Pass the strap under the front of the spring and through the middle of the d-ring.



STEP 2:

Loop the strap over the top of the d-ring and back under the front of the spring and pull tight.

Hardware: Assembly of the Spring Assembly




Step 1:

Begin with a strap, a buckle, and a standard spring. The buckle should sit with the ridges facing up.




Step 2:

Insert the strap, from the bottom, into the first section of the buckle.

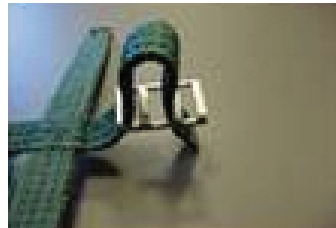


Step 3:

Weave the strap into the middle section of the buckle.

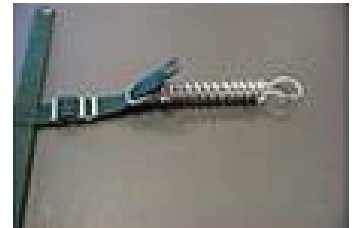


Step 4:

Slide on the triangle end of the spring. Make sure the hooks of the spring are facing up, so they don't scrape on the concrete.

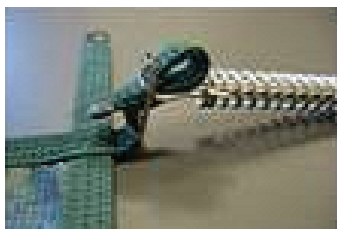

Step 5

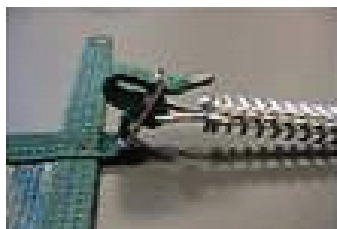

Step 6



Step 7