


8'0" 14'0" 3'0" 3'4" AREA PERIMETER VOLUME

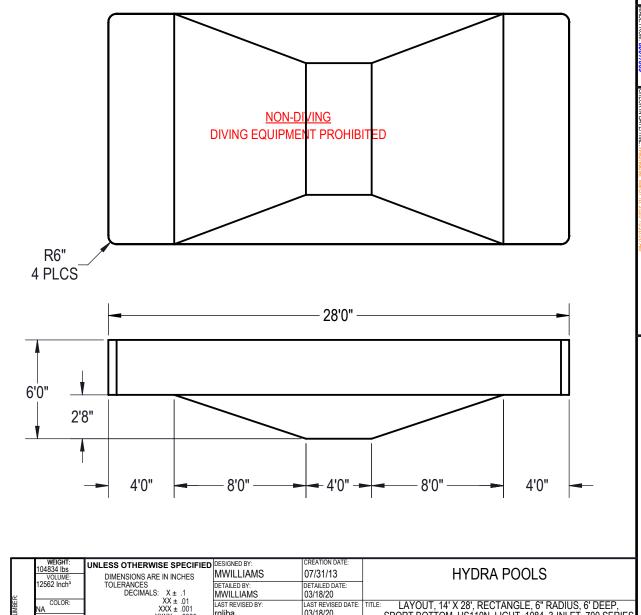

03/18/20

03/18/20

LAST REVISED DATE: TITLE:

PART NUMBER:

LAYOUT, 14' X 28', RECTANGLE, 6" RADIUS, 6' DEEP,

SPORT BOTTOM, HS110N, LIGHT, 1084, 3-INLET, 700 SERIES

00018148

SCAL F

1:96

SHEET: 2 OF 3

SIZE

A

MWILLIAMS

rgliba

Water

MATERIAL:

XXXX ± .0005

ANGULAR: X ± 0.5

THIRD ANGLE PROJECTION

(0)

LAST REVISED BY:

SQ. FT. FT. U.S. GALLONS 391.79 83.14 12562

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER. 1.
- 2. DIMENSIONS ARE FROM INSIDE POOL PANELS.

3'0"

- 3 ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- 4 HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP

EXCAVATION NOTES:

- 5. ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF. 6
- 7 LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL. 8.
- 9. FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL
- 11. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

000 C:\PDM Working\00018148

COLOR

HEAT TREAT:

FINISH:

TEXTURE:

NΑ

48win

ΞÒΟ

