

NOTES:

- 1. THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.

EXCAVATION NOTES:

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- 7. LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- 9. FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL.
- 11. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS


IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

1 2		BOLT, FLANGE, 3/8-16 X 1", PACK (50) BRACE, FOLD OVER WITH TURNBUCKLE, STEEL, HPSFOB	HPS1916 HPSFOB	HPS1916	6
			HDSEUD		
	PANEL, STRAIGHT		TIF SFUB	HPSFOB	26
3		PANEL, 2' LONG, 600 SERIES	HPSD102P	00000639	4
4	PANEL, STRAIGHT	PANEL, 4' LONG, 600 SERIES	HPSD104P	00000274	1
5	PANEL, STRAIGHT	PANEL, 6' LONG, 600 SERIES	HPSD106P	00000676	2
6	PANEL, STRAIGHT	PANEL, 8' LONG, 1084, 600 SERIES	HPSD10884	00002006	1
7		PANEL, 8' LONG, 600 SERIES	HPSD108P	00000687	1
8	PANEL, STRAIGHT	PANEL, 8' LONG, INLET, 600 SERIES	HPSD108I	00000699	3
9	PANEL, STRAIGHT	PANEL, 8' LONG, LIGHT, 600 SERIES	HPSD108L	00000701	1
10	HS310N	8' TWIN SEAT STEP			1
11	PANEL, WEDGE	WEDGE, 2 1/2" X 2 1/2" X 90°-600-ASSEMBLY	HPSD6CA	00005721	8
12	PANEL, RR	PANEL, 2' REVERSE RADIUS, 3'-1 3\4" LONG, 600 SERIES	HPSD2RR	00000288	4

REVISION HISTORY

	WEIGHT: 148511.5 lbs VOLUME: Inch ³	DINILINGIONO AINL IN INGITILO	JRITTENHOUSE	12/11/2014	SAMSON STEEL
άć		DECIMALS: X ± .1	DETAILED BY: JRITTENHOUSE	DETAILED DATE: 2/13/2019	
DRAWING NUMBER:	COLOR: HEAT TREAT:	XXX ± .001 XXXX ± .0005	LAST REVISED BY: jrittenhouse	LAST REVISED DATE: 2/13/2019	TITLE: LAYOUT, 16' X 32', HAMPTON, 2' RADIUS REVERSE, 6' DEEP, HS310N, LIGHT, 3- INLET, 1084, 600 SERIES
35 35 E	FINISH:	ANGULAR: X ± 0.5	MATERIAL:		
31 31	TEXTURE:	THIRD ANGLE PROJECTION			PART NUMBER: SCALE: SIZE:
00023					PART NUMBER: 00023135 SLALE: 1:96 SHEET: 10F3
	Mworking\000231	35			

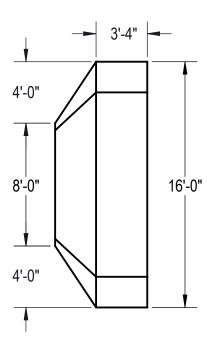

Area: 499.43ft ^2 Perimeter: 92.57ft Volume = 15434 US gallons

NOTES:


- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- 3. ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.


EXCAVATION NOTES:

- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- 6. SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- 9. FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- 10. BACK FILL WITH NON-EXPANSIVE MATERIAL.
- 1. FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS


IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

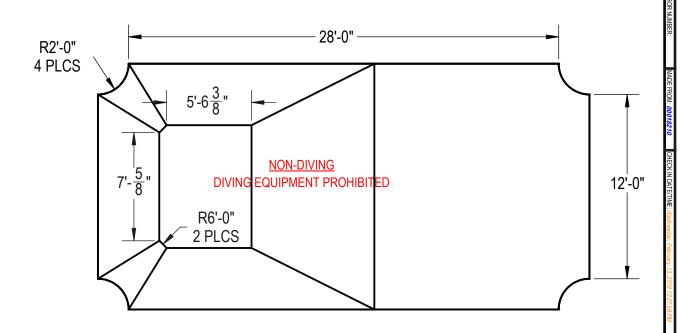

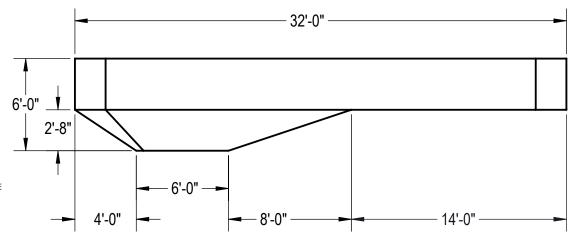

	WEIGHT: Ibs VOLUME: Inch³	TOLERANCES	DESIGNED BY: JRITTENHOUSE DETAILED BY: JRITTENHOUSE	4/16/2013 DETAILED DATE: 2/13/2019	SAMSON STEEL
NO023135	COLOR: NA HEAT TREAT: NA FINISH: NA TEXTURE: NA	XX ± .01 XXX ± .001 XXXX ± .0005	LAST REVISED BY: jrittenhouse MATERIAL:	LAST REVISED DATE: 2/13/2019	TITLE: LAYOUT, 16' X 32', HAMPTON, 2' RADIUS REVERSE, 6' DEEP, HS310N, LIGHT, 3- INLET, 1084, 600 SERIES PART NUMBER: SCALE: 1.96 1.96
w .	Mworking\000231	35			00020100 20F3 / 1

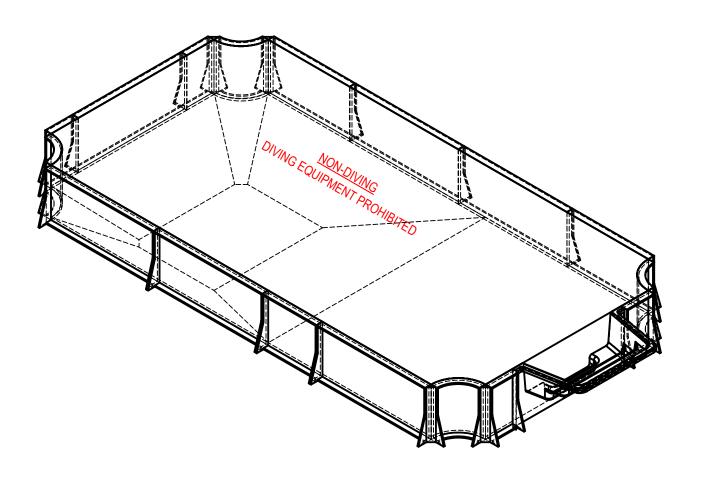

	WEIGHT: 148511.5 lbs VOLUME:	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DESIGNED BY: JRITTENHOUSE	12/11/2014	SAMSON STEEL
άŁ	Inch ³	DECIMALS: X ± .1	JRITTENHOUSE	DETAILED DATE: 2/13/2019	
NUMBER	COLOR: HEAT TREAT:	XXX ± .001 XXXX ± .0005	LAST REVISED BY: jrittenhouse MATERIAL:	LAST REVISED DATE: 2/13/2019	TITLE: LAYOUT, 16' X 32', HAMPTON, 2' RADIUS REVERSE, 6' DEEP, HS310N, LIGHT, 3- INLET, 1084, 600 SERIES
RAWING 35	FINISH:	ANGULAR: X ± 0.5 THIRD ANGLE PROJECTION	IMATERIAL.		
ERING DI 1231	TEXTURE:	(C)			PART NUMBER: SCALE: SIZE: 1:96
0002	1: \00000	7			00023135 SHEET: A