


SWITCH ON. GO WIRELESS.

BROMIC SMART-HEAT™ CONTROLS

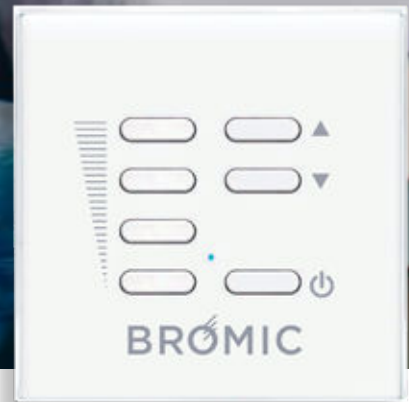

CONTROL OPTION

SIMPLE, SMART AND WIRELESS



Wireless Controls

Less wires means fast, easy installation saving you time and money.

Range of Control

100 ft (30m) range with no line of sight needed for control. Simply click and go.

Compact Design

Smart design allows for Wireless Remote to be hand held or wall mounted so it is easily hidden from sight, so as not to intrude on your space.

Simplified Wiring Installation

Greater controllability with one-touch pairing. No routing or control unit required.

Control your Heat Output

Vary your heat output for complete flexibility.



ON | OFF 4-CHANNEL REMOTE*

The Bromic Smart-Heat Wireless On | Off Controller can switch power supply to two separate outputs, enabling independent 'On | Off' control without even having to move from your seat thanks to its wireless capabilities.



DIMMER CONTROLLER*

The Bromic Smart-Heat Wireless Dimmer Controller allows you to adjust the heat from 1-100% for perfect comfort and complete flexibility, making sure you can enjoy the outdoors even when its gets a little colder.

A man and a young boy are seen from behind, looking towards a string of warm, glowing lights at night. The man is on the left, and the boy is in the center. The background is dark with many out-of-focus lights, creating a bokeh effect. The overall mood is warm and cozy.

FOCUS ON WHAT YOU ENJOY DOING.

With wireless remote options available for your outdoor heating solutions, switch on comfort effortlessly.


From a single point you can control multiple heaters, turning them off & on as well as dimming the heat outputs for electric models.


The Smart-Heat™ range of controllers provide a simple, yet powerful solution to controlling your environment, making outdoor heating easy.

CONTROLS SIMPLE, SMART AND WIRELESS



Outdoor area

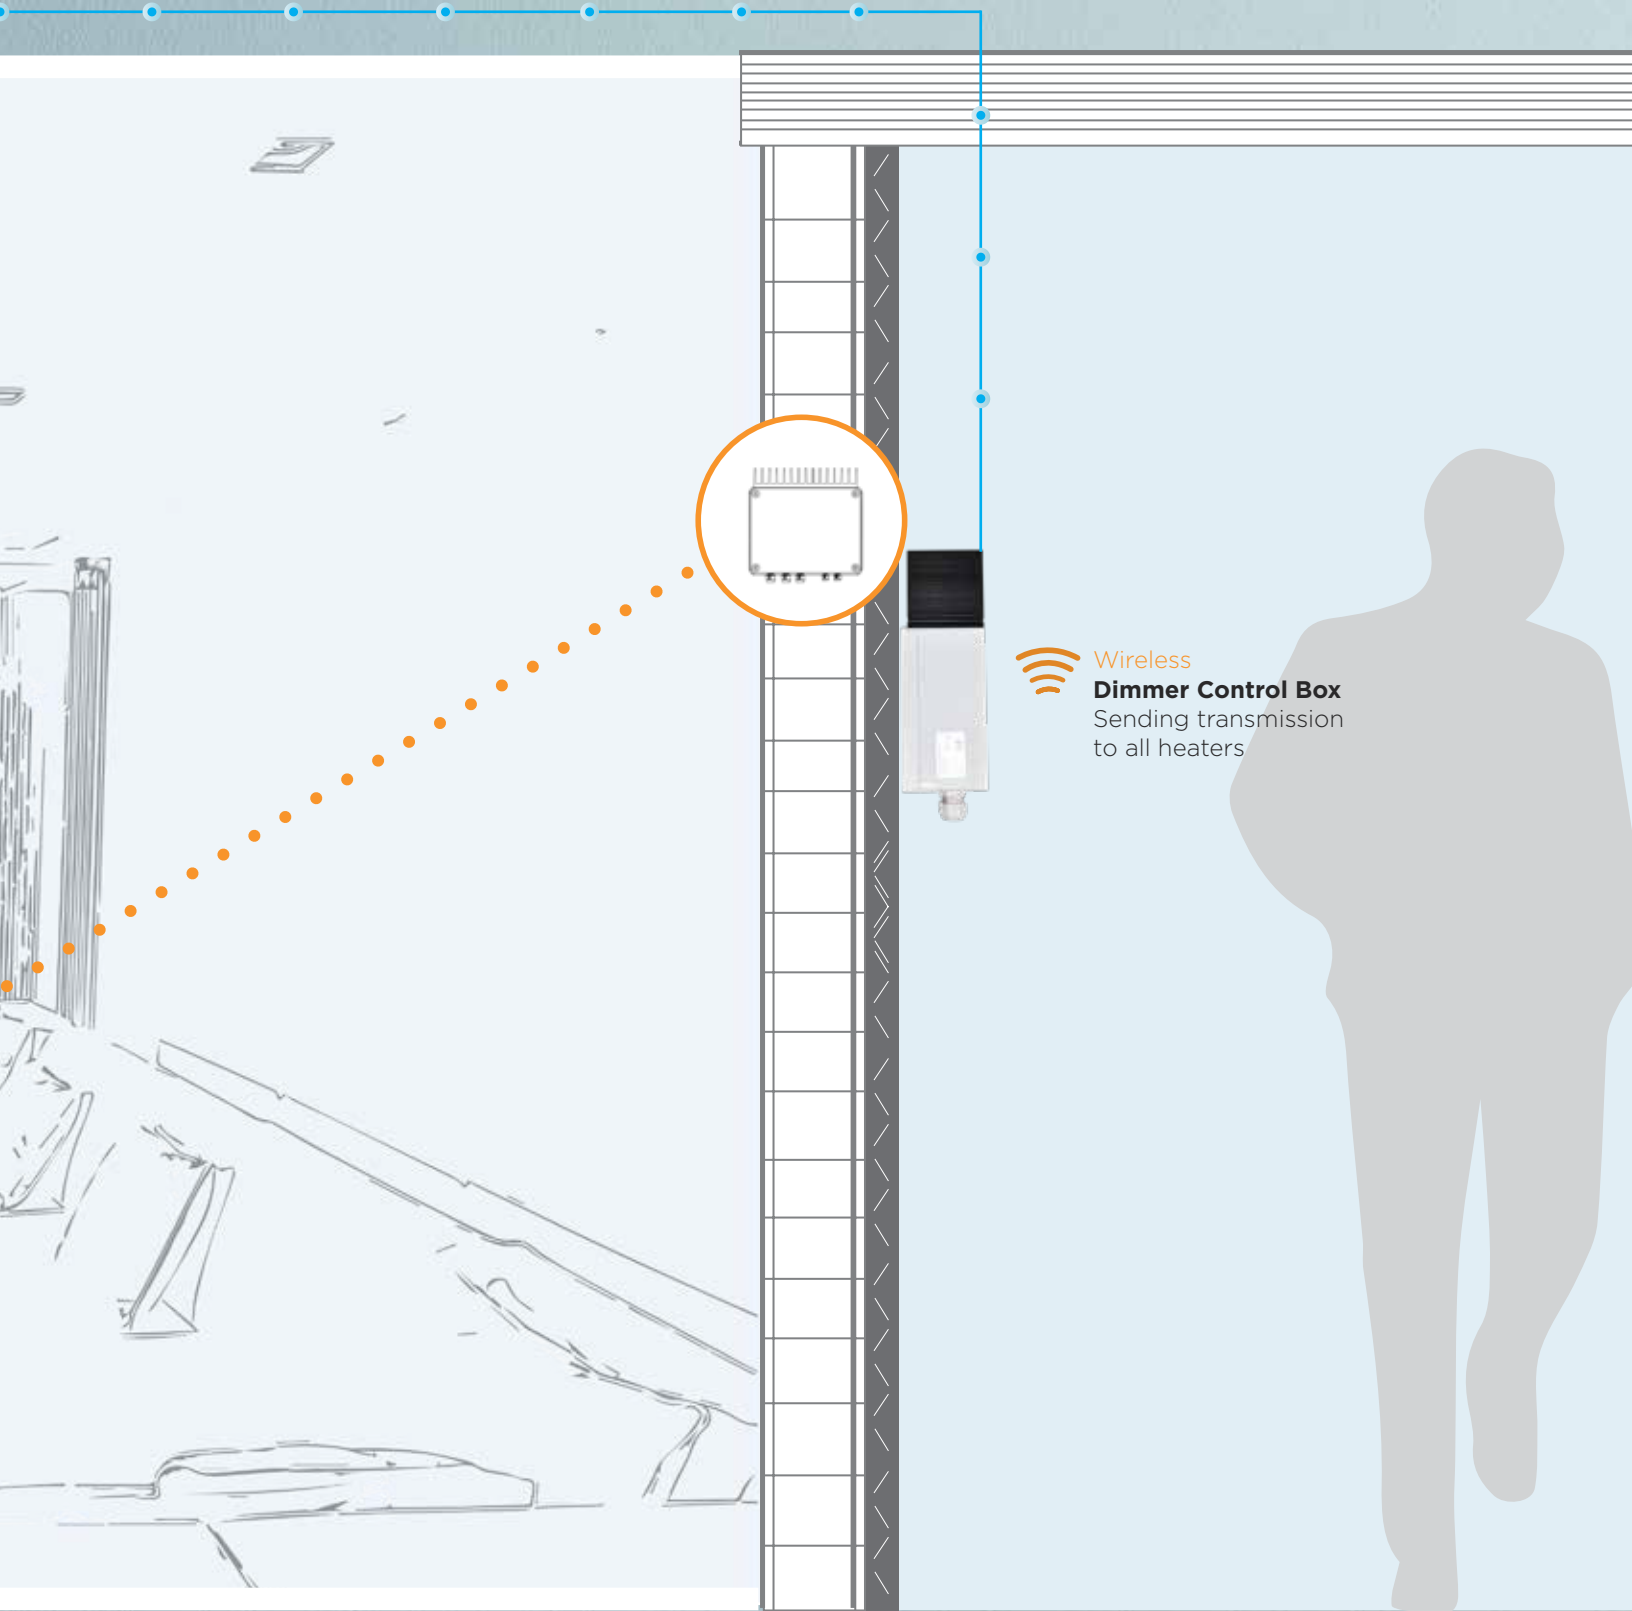

 **Wireless Dimmer Control Box**
Sending transmission to all heaters



Smart-Heat
Wireless Dimmer Controller
Allows the power output of a heater to be adjusted for perfect comfort, with the ability to adjust multiple units in unison with a single remote


Indoor room

WIRING DIAGRAMS

SET UP SOLUTIONS


Electric Heater Solution

INSTALLATION OPTIONS	
Option 1:	1 x 6000W
Option 2:	1 x 4000W
Option 3:	2 x 3400W
Option 4:	2 x 3000W
Option 5:	2 x 2000W

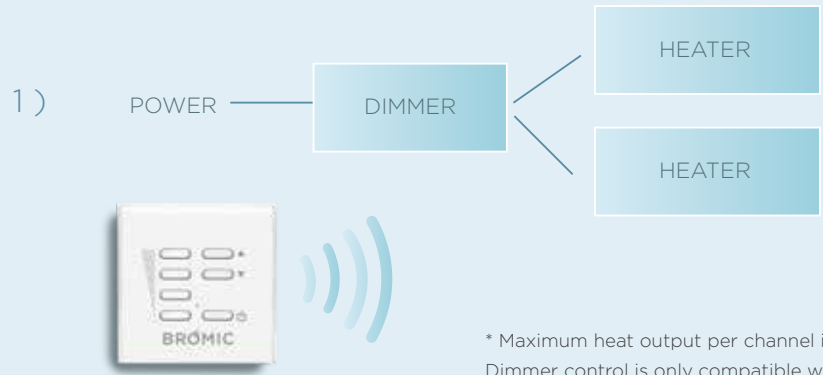

WIRELESS CONTROL


* Maximum heat output per channel is 3.4Kw, Dimmer control is only compatible with electric heaters. This solution does not apply to dual element electric heaters. Please contact a heating specialist to discuss the ideal solution for your outdoor space.

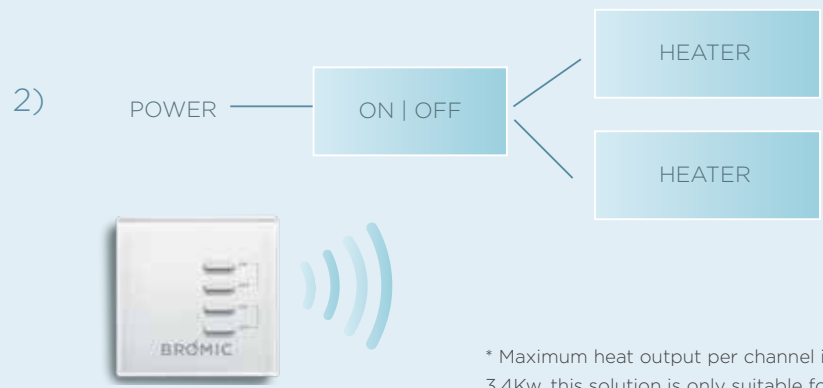

WIRELESS CONTROL

* Maximum heat output per channel is 3.4Kw, this solution is only suitable for electric heaters

Gas Heater Solution

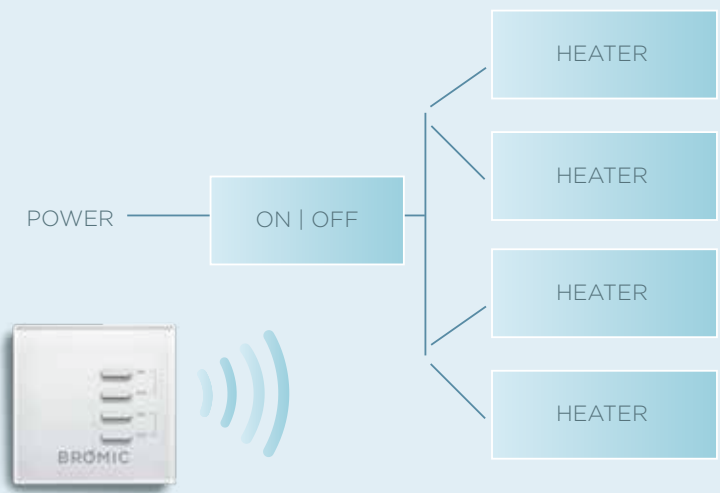

WIRELESS CONTROL

* This solution is only suitable for Gas heaters.

ON | OFF

SMART-HEAT™ CONTROLLER

MODEL NUMBER	BH3130010-1
POWER SUPPLY	110/230VAC, 31A max, Single Phase
MAX OUTPUT POWER CHANNEL	3400W @ 230VAC 1500W @ 110VAC
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-4 to 122°F
MAXIMUM REMOTE MEMORIZED	42
DIMENSIONS	7" x 5.5" x 3.3"
PROTECTION CLASS	IP54



DIMMER

SMART-HEAT™ CONTROLLER

MODEL NUMBER	BH3130011-1
POWER SUPPLY	110/277VAC 50/60Hz (29A.max)
MAX OUTPUT POWER CHANNEL	6800W @ 277VAC (25A) 6800W @ 240VAC (28.5A.) 3080W @ 110VAC (28A.)
FUSE PROTECTION	32A (FWC high speed)
RECEPTION FREQUENCY	916MHz
OPERATING TEMPERATURE RANGE	-4/86°F
MAXIMUM REMOTE MEMORIZED	42
DIMENSIONS	9" x 7.9" x 2.95"
PROTECTION CLASS	IP54



^Arrange all the necessary safety devices and use only materials complying with the standard of electrical installations.

BROMIC.COM/GOWIRELESS

ASIA PACIFIC

10 Phiney Place, Ingleburn
Sydney NSW 2565

info@bromic.com

1300 276 642

NORTH AMERICA

18 Technology Drive, STE 121,
Irvine California 92618 USA

info@bromic.com

800 301 1293

EUROPE

Weinuallee 19
02763 Zittau Germany

info@bromic.com

+49 (0) 358 3518 9885