PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™
Electric heater is specifically suited for low-clearance
and design-focused spaces. This slim-line, stainless steel uni
spreads comfort evenly in its space, all while minimising ligh
emission and blending seamlessly into the background with
our recess mounting solutions.



2300W SERIES
BLACK | WHITE

3400W SERIES BLACK | WHITE





SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES
FUEL TYPE	ELECTRIC	ELECTRIC
COLOR	BLACK WHITE	BLACK WHITE
HEAT AREA	65FT	108FT
RATED CURRENT	230 - 240V/9.6A	230 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 72" CEILING 96'	WALL 72" CEILING 96"
MOUNTING OPTIONS		
CEILING MOUNT	✓	✓
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	✓	✓
CEILING POLE MOUNT	✓	✓
FREESTANDING	-	-
CONTROL OPTIONS		
ON OFF	✓	✓
DIMMER	✓	✓
MASTER REMOTE *	✓	✓


Measurements displayed within this document are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations.

All measurement in this document are displayed in inches.

DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

PROFILE




CEILING RECESS

CEILING RECESS FRAME 2300W




CEILING RECESS FRAME 3400W


MINIMUM CAVITY OPTION 2




MINIMUM CAVITY OPTION 1










^{*} Control up to six zones of heaters with unlimited heaters per zone from a single control. Works only with dimming controllers. Control operates within 100ft of heaters.

MOUNT OPTIONS


With a wide array of mounting options, Bromic offers solutions to compliment any décor and provide functionality for ambiance and comfort.

CEILING & WALL MOUNT

CEILING MOUNT CLEARANCE





CEILING POLE CLEARANCE



WALL BRACKET (INCLUDED)

CEILING BRACKET (INCLUDED)





HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.


HEAT AREAS

2300W SERIES

HEATING APPROXIMATELY 65FT 2300W HEATING POWER

3400W SERIES

HEATING APPROXIMATELY 108FT 3400W HEATING POWER

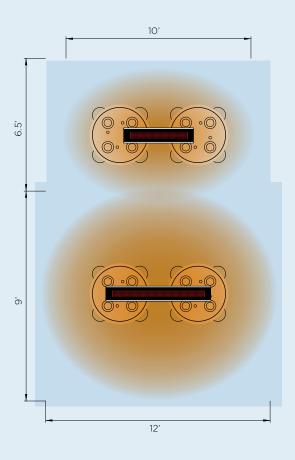

CONTROL OPTIONS



ON | OFF CONTROL



DIMMER CONTROL



MASTER REMOTE



VERSATILE MOUNTING SOLUTION

Minimal vertical clearance

HIGH PERFORMANCE CONSTRUCTION

304 stainless steel & tinted ceramic screer



CLEAN, COMPACT AND ELEGANT DESIGN

For seamless integration



ADJUSTABLE MOUNTING BRACKETS

Allows for directriona heat distribution

BROMIC.COM/HEAT

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.