


REVISION HISTORY				
REV.	DESCRIPTION	DATE	ECO	BY
A	RELEASE FOR QUOTE	2/19/2020		adold

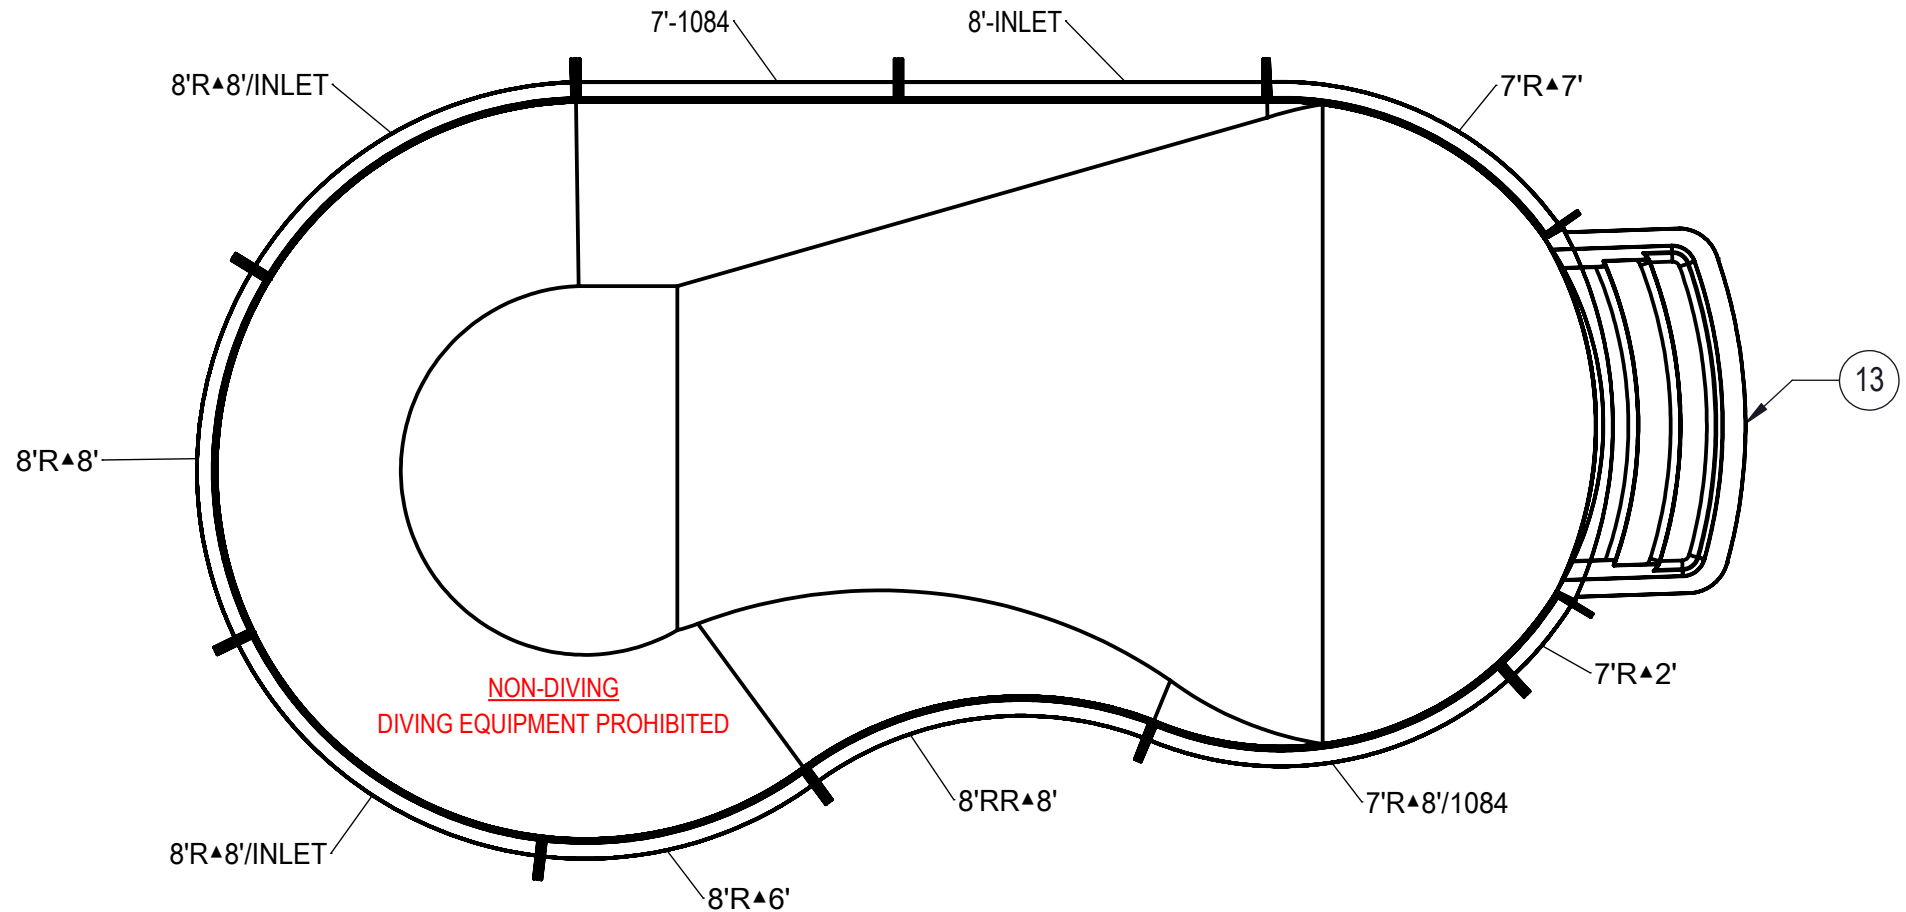

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.

EXCAVATION NOTES:



- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- BACK FILL WITH NON-EXPANSIVE MATERIAL.
- FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS

IMPORTANT NOTES:


THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

ITEM	FILE NAME	DESCRIPTION	CUSTOMER DRAWING #	VENDOR PART #	QTY.
1	BOLT, PACK	BOLT, FLANGE, 3/8-16 X 1", PACK (50)	HPS1916	HPS1916	5
2	SBRACE	BRACE, FOLD OVER WITH TURNBUCKLE, STEEL, HPSFOB	HPSFOB	HPSFOB	11
3	PANEL, STRAIGHT	PANEL, 7' LONG, 1084, 700 SERIES	HPSE10784	00013490	1
4	PANEL, RADIUS	PANEL, 7' RADIUS, 2' LONG, 700 SERIES	HPSE7R2	00006402	1
5	PANEL, RADIUS	PANEL, 7' RADIUS, 7' LONG, 700 SERIES	HPSE7R7	00021810	1
6	PANEL, RADIUS	PANEL, 7' RADIUS, 8' LONG, 1084, 700 SERIES	HPSE7R884	00020743	1
7	PANEL, STRAIGHT	PANEL, 8' LONG, INLET, 700 SERIES	HPSE1081	00004969	1
8	PANEL, RADIUS	PANEL, 8' RADIUS, 6' LONG, 700 SERIES	HPSE8R6	00020722	1
9	PANEL, RADIUS	PANEL, 8' RADIUS, 8' LONG, 700 SERIES	HPSE8R8	00020723	1
10	PANEL, RADIUS	PANEL, 8' RADIUS, 8' LONG, INLET, 700 SERIES	HPSE8R8I	00020726	2
11	PANEL, RR	PANEL, 8' REVERSE RADIUS, 8' LONG, 700 SERIES	HPSE8RR8	00020732	1
12	STAKE	STAKE, 14 GA	HPSSTAKE	00003484	11
13	HS106N	STEP, 8' RADIUS, 3 TREAD	HS106N	HS106NG	1

ENGINEERING DRAWING NUMBER: 00028981	WEIGHT: lbs	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS: X ± 0.1 XX ± 0.01 XXX ± 0.005 XXXX ± 0.0005 ANGULAR: X ± 0.5 THIRD ANGLE PROJECTION 	DESIGNED BY: ADOLD	CREATION DATE: 7/22/2013	ATLAS STEEL	
	VOLUME: Inch³		DETAILED BY: adold	DETAILED DATE: 2/19/2020		
	COLOR:		LAST REVISED BY: adold	LAST REVISED DATE: 2/19/2020	TITLE: LAYOUT, 16' X 30' STRAIGHT WALL KIDNEY LEFT, 8' DEEP, HS106N, 3- INLETS, 1- 1084, 700 SERIES	
	HEAT TREAT:		MATERIAL:			
	FINISH:				PART NUMBER: 00028981	SCALE: 1:128 SHEET: 1 OF 3
	TEXTURE:					SIZE: A

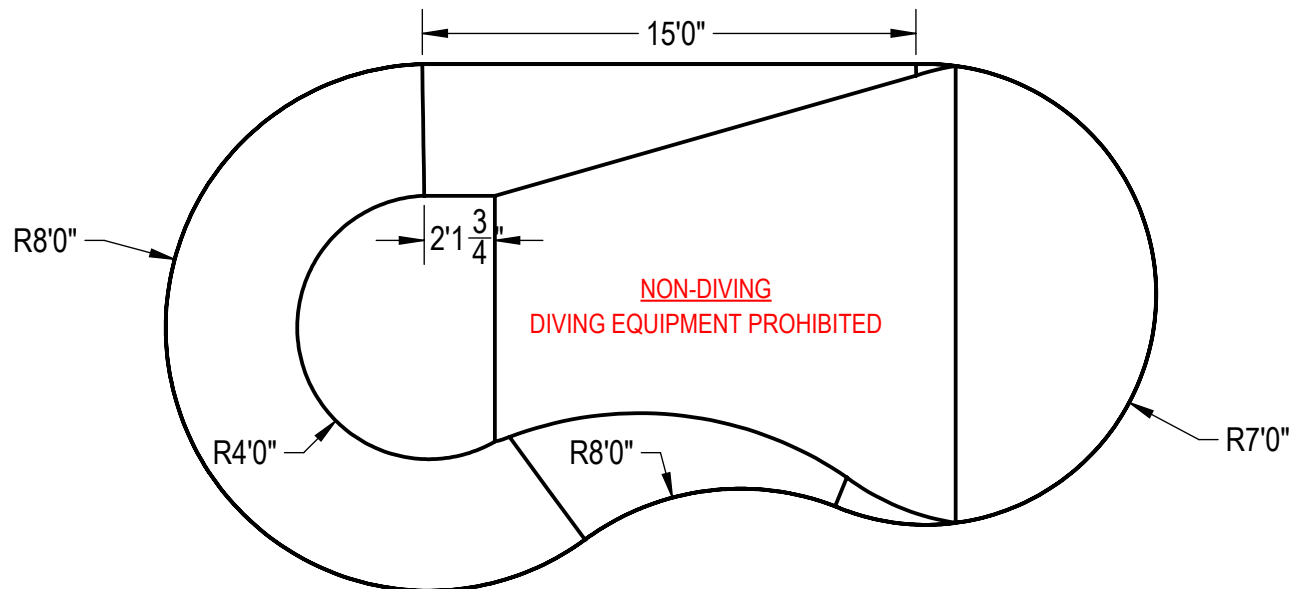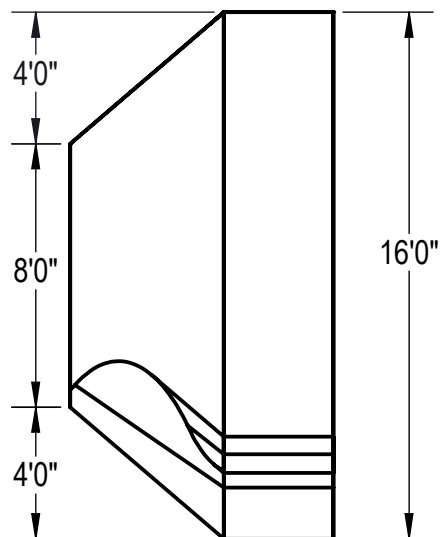

AREA	PERIMETER	VOLUME
SQ. FT.	FT.	U.S. GALLONS
389.84	78.11	15346.451

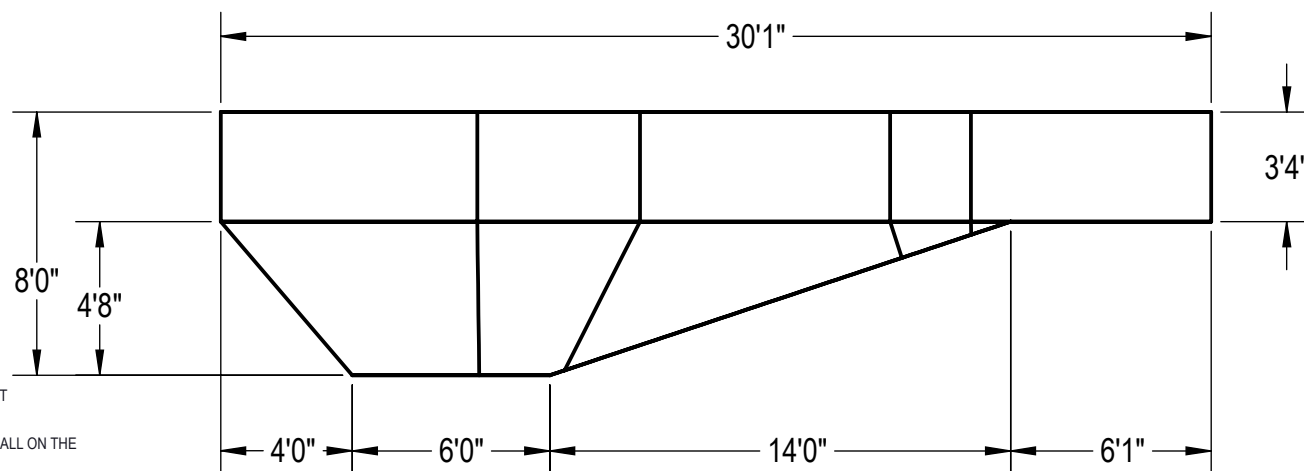

NOTES:

- THESE ARE FINISHED DIMENSIONS READY FOR THE LINER.
- DIMENSIONS ARE FROM INSIDE POOL PANELS.
- ROPE AND FLOAT ASSEMBLY SHOULD BE INSTALLED IN ACCORDANCE WITH CURRENT ANSI/ASPS/ICC REGULATIONS
- HYDRA LINER TRACK FOR STEPS IS INSTALLED WITH THE BARB FACING THE RISER WALL ON THE STEP.


EXCAVATION NOTES:


- ROUGH EXCAVATION SHOULD BE 2" DEEPER IN EACH INSTANCE.
- SOIL TO HAVE MINIMUM BEARING CAPACITY OF 1500 PSF.
- LOCATE TOP OF POOL AT LEAST 6" ABOVE THE SURROUNDING LAND ELEVATION.
- SEE "OVER DIG DETAIL" FOR EXCAVATION AROUND POOL.
- FILL VOIDS UNDER BASE OF PANELS AND TAMP WELL.
- BACK FILL WITH NON-EXPANSIVE MATERIAL.
- FOLLOW ALL CURRENT ANSI / APSP / ICC GUIDELINES FOR RESIDENTIAL POOLS

IMPORTANT NOTES:

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. THE DEALER OR CONTRACTOR WHO SELLS OR INSTALLS YOUR POOL IS AN INDEPENDENT CONTRACTOR AND IS NOT AN AGENT OF THE MANUFACTURER. THE CONSTRUCTION METHODS ILLUSTRATED HERE ARE SUGGESTIONS AND APPLY ONLY TO NORMAL GROUND CONDITIONS. THERE MAY BE ADDITIONAL PRECAUTIONS AND/OR METHODS OF CONSTRUCTION. PROPER INSTALLATION IS THE RESPONSIBILITY OF THE DEALER/BUILDER/CONTRACTOR.

ENGINEERING DRAWING NUMBER: 00028981	WEIGHT: lbs	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS: X ± 0.1 XX ± 0.01 XXX ± 0.005 XXXX ± 0.0005 ANGULAR: X ± 0.5 THIRD ANGLE PROJECTION 	DESIGNED BY: ADOLD	CREATION DATE: 7/22/2013	ATLAS STEEL	
	VOLUME: 15346.451 Inch ³		DETAILED BY: adold	DETAILED DATE: 2/19/2020		
	COLOR:		LAST REVISED BY: adold	LAST REVISED DATE: 2/19/2020	TITLE: LAYOUT, 16' X 30' STRAIGHT WALL KIDNEY LEFT, 8' DEEP, HS106N, 3-INLETS, 1- 1084, 700 SERIES	
	HEAT TREAT:		MATERIAL:			
	FINISH:					
TEXTURE:			PART NUMBER: 00028981	SCALE: 1:128 SHEET: 2 OF 3	SIZE: A	

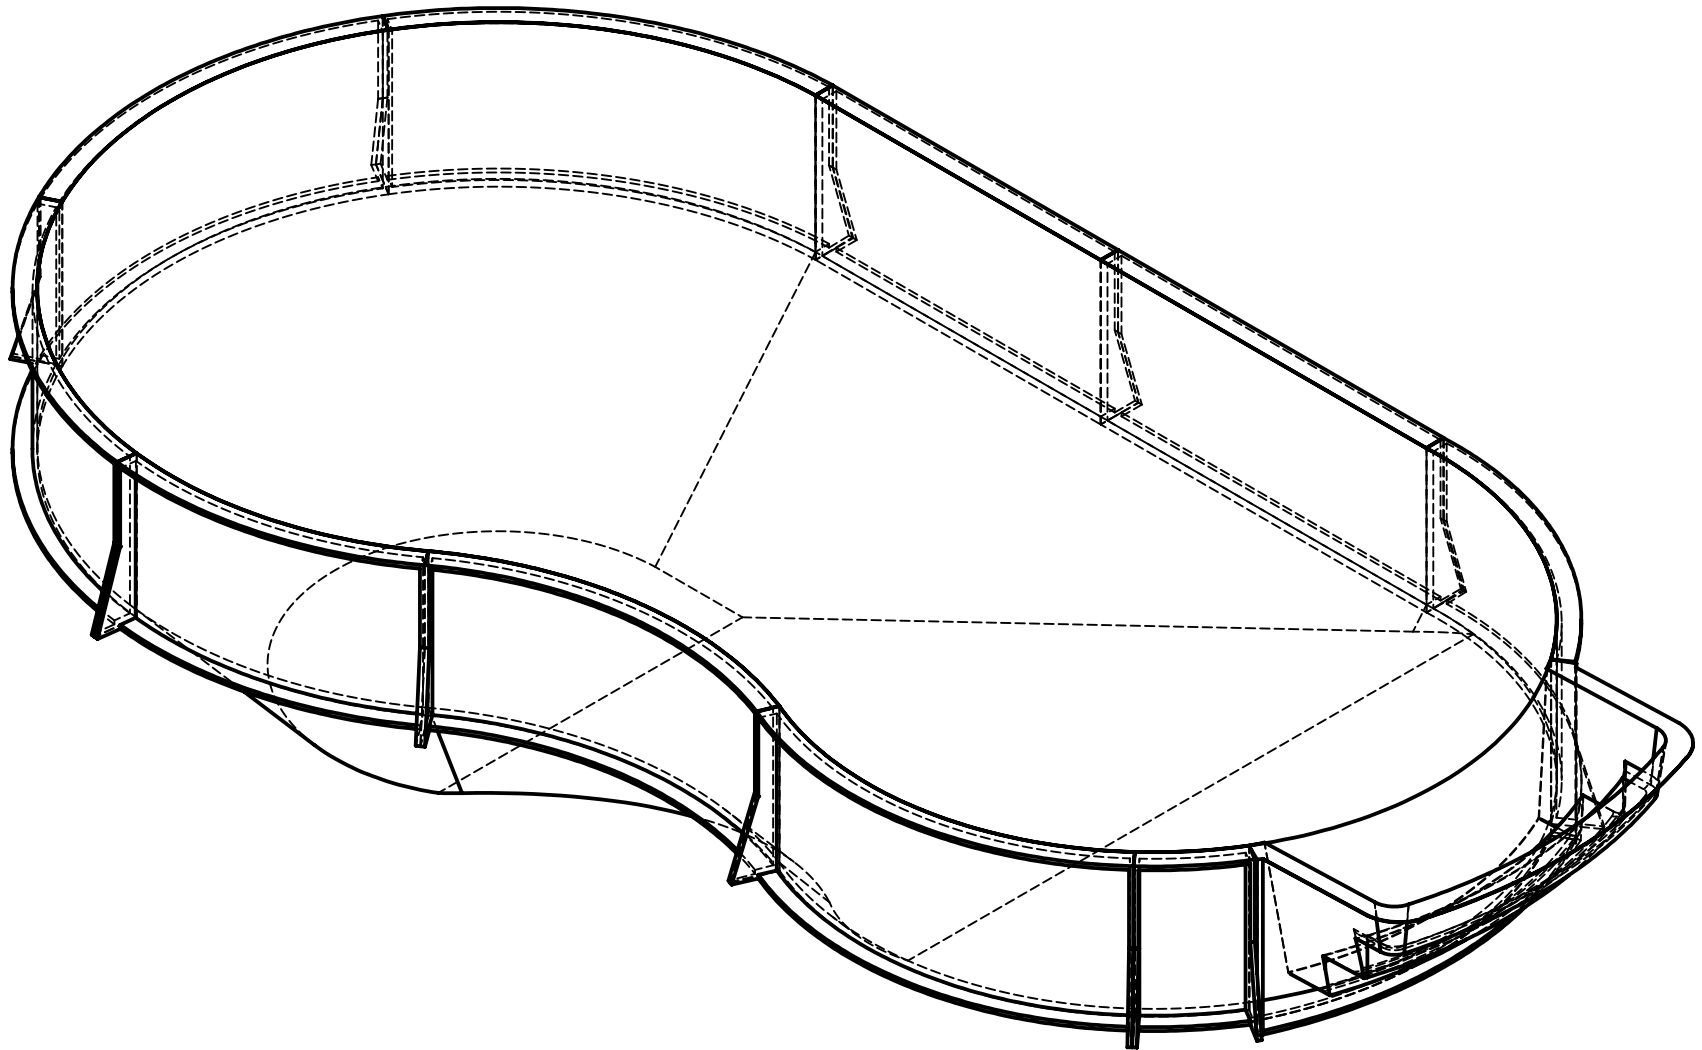

ENGINEERING DRAWING NUMBER: 00028981	WEIGHT:	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS: X ± 0.1 XX ± 0.01 XXX ± 0.005 XXXX ± 0.0005 ANGULAR: X ± 0.5 THIRD ANGLE PROJECTION 	DESIGNED BY:	CREATION DATE:	ATLAS STEEL	
	lbs		ADOLD	7/22/2013		
	VOLUME:		DETAILED BY:	DETAILED DATE:	TITLE: LAYOUT, 16' X 30' STRAIGHT WALL KIDNEY LEFT, 8' DEEP, HS106N, 3- INLETS, 1- 1084, 700 SERIES	
	Inch³		adold	2/19/2020		
	COLOR:		LAST REVISED BY:	LAST REVISED DATE:		
	HEAT TREAT:		adold	2/19/2020		
FINISH:	MATERIAL:		PART NUMBER:	SCALE:	SIZE:	
TEXTURE:			00028981	1:128	A	
				SHEET:		
				3 OF 3		